


L:\MoraineOH\16616-01_NatatoriumDemo\61601\Roadway\Sheets\1661601GT001.DGN 9/26/2016 2:58:07 PM benbrown



LOCATION MAP

LATITUDE: 39°41'06.4" LONGITUDE: 84°15'18.3"

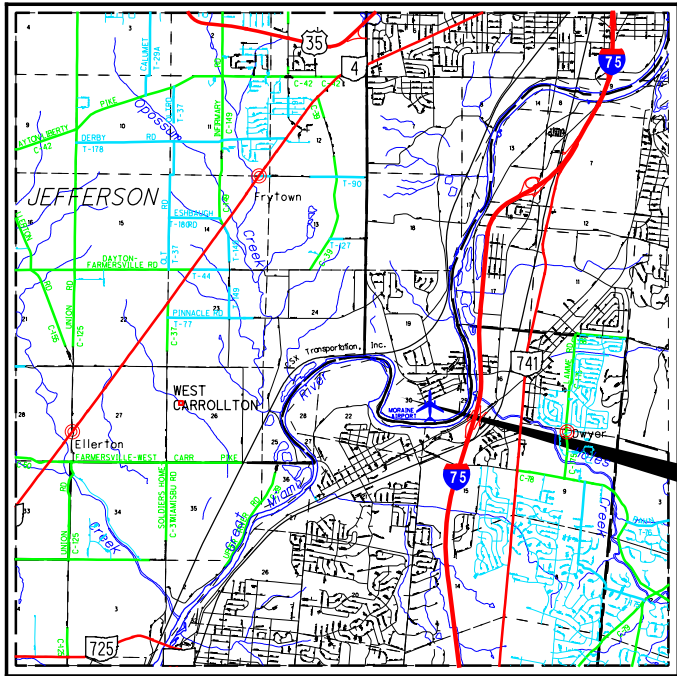

PORTION TO BE IMPROVED	-----	=====
INTERSTATE HIGHWAY	-----	=====
FEDERAL ROUTES	-----	=====
STATE ROUTES	-----	=====
COUNTY & TOWNSHIP ROADS	-----	=====
OTHER ROADS	-----	=====

UNDERGROUND UTILITIES

CONTACT BOTH SERVICES
CALL TWO WORKING DAYS
BEFORE YOU DIG

CALL

1-800-362-2764

(TOLL FREE)

OHIO UTILITIES PROTECTION SERVICE

NON-MEMBERS

MUST BE CALLED DIRECTLY

OIL & GAS PRODUCERS UNDERGROUND

PROTECTION SERVICE CALL: 1-800-925-0988

PLAN PREPARED BY:



CITY OF MORaine

NATATORIUM AND SPLASH!

MORaine

DEMOLITION

PROJECT
LOCATION

INDEX OF SHEETS:

TITLE SHEET	1
MORaine NATATORIUM DEMOLITION	2
SPLASH! MORaine DEMOLITION	3

PROJECT DESCRIPTION

PROJECT CONSISTS OF REMOVING THE EXISTING MORaine NATATORIUM AND THE EXISTING WATER PARK, AS AN ADD ALTERNATIVE.

ENGINEERS SEAL	STANDARD CONSTRUCTION DRAWINGS			SUPPLEMENTAL SPECIFICATIONS
SIGNED: _____ DATE: _____				

APPROVED _____
DATE _____ CITY MANAGER

APPROVED _____
DATE _____ PARKS AND RECREATION DIRECTOR

NATATORIUM AND SPLASH! MORaine DEMOLITION	CONSTRUCTION PROJECT NO. N / A	PID NO. N / A	STARE PROJECT NO. N / A
1 3			

L:\Moraine0H\16616-01_NatatoriumDemo\61601\Roadway\Sheets\1661601C001.DGN 9/26/2016 2:58:08 PM benbrown



DEMOLITION LIMITS

NOTES:

- * CITY TO APPROVE SAWCUT LOCATIONS PRIOR TO DEMOLITION.
- * SAWCUT LIMITS ARE APPROXIMATE AND SHALL BE ALONG NATURAL JOINTS. SALVAGE AS MUCH OF EXISTING CONCRETE AS POSSIBLE.
- * CONTRACTOR TO VERIFY AND COORDINATE WITH CITY ON THE LOCATION OF WATERMAIN AND VALVES.
- * CITY ONLY TO OPERATE MAINLINE VALVES.



MORaine NATATORIUM DEMOLITION
BASE BID

REMOVAL PLAN

2
3


SAWCUT LIMITS
(TYP)

REMOVE NATATORIUM AND CONCRETE DECK

ALL OTHER UTILITES ARE
ABANDONED WITHIIN
DEMOLITION AREA

CONTRACTOR TO LOCATE,
CAP WATERMAIN AND
ABANDON TO NEAREST
VALVE. LOCATION SHOWN
IS APPROXIMATE

L:\Moraine0H\16616-01_NatatoriumDemo\61601\Roadway\Sheets\1661601CB002.DGN 9/26/2016 2:58:11 PM benbrown

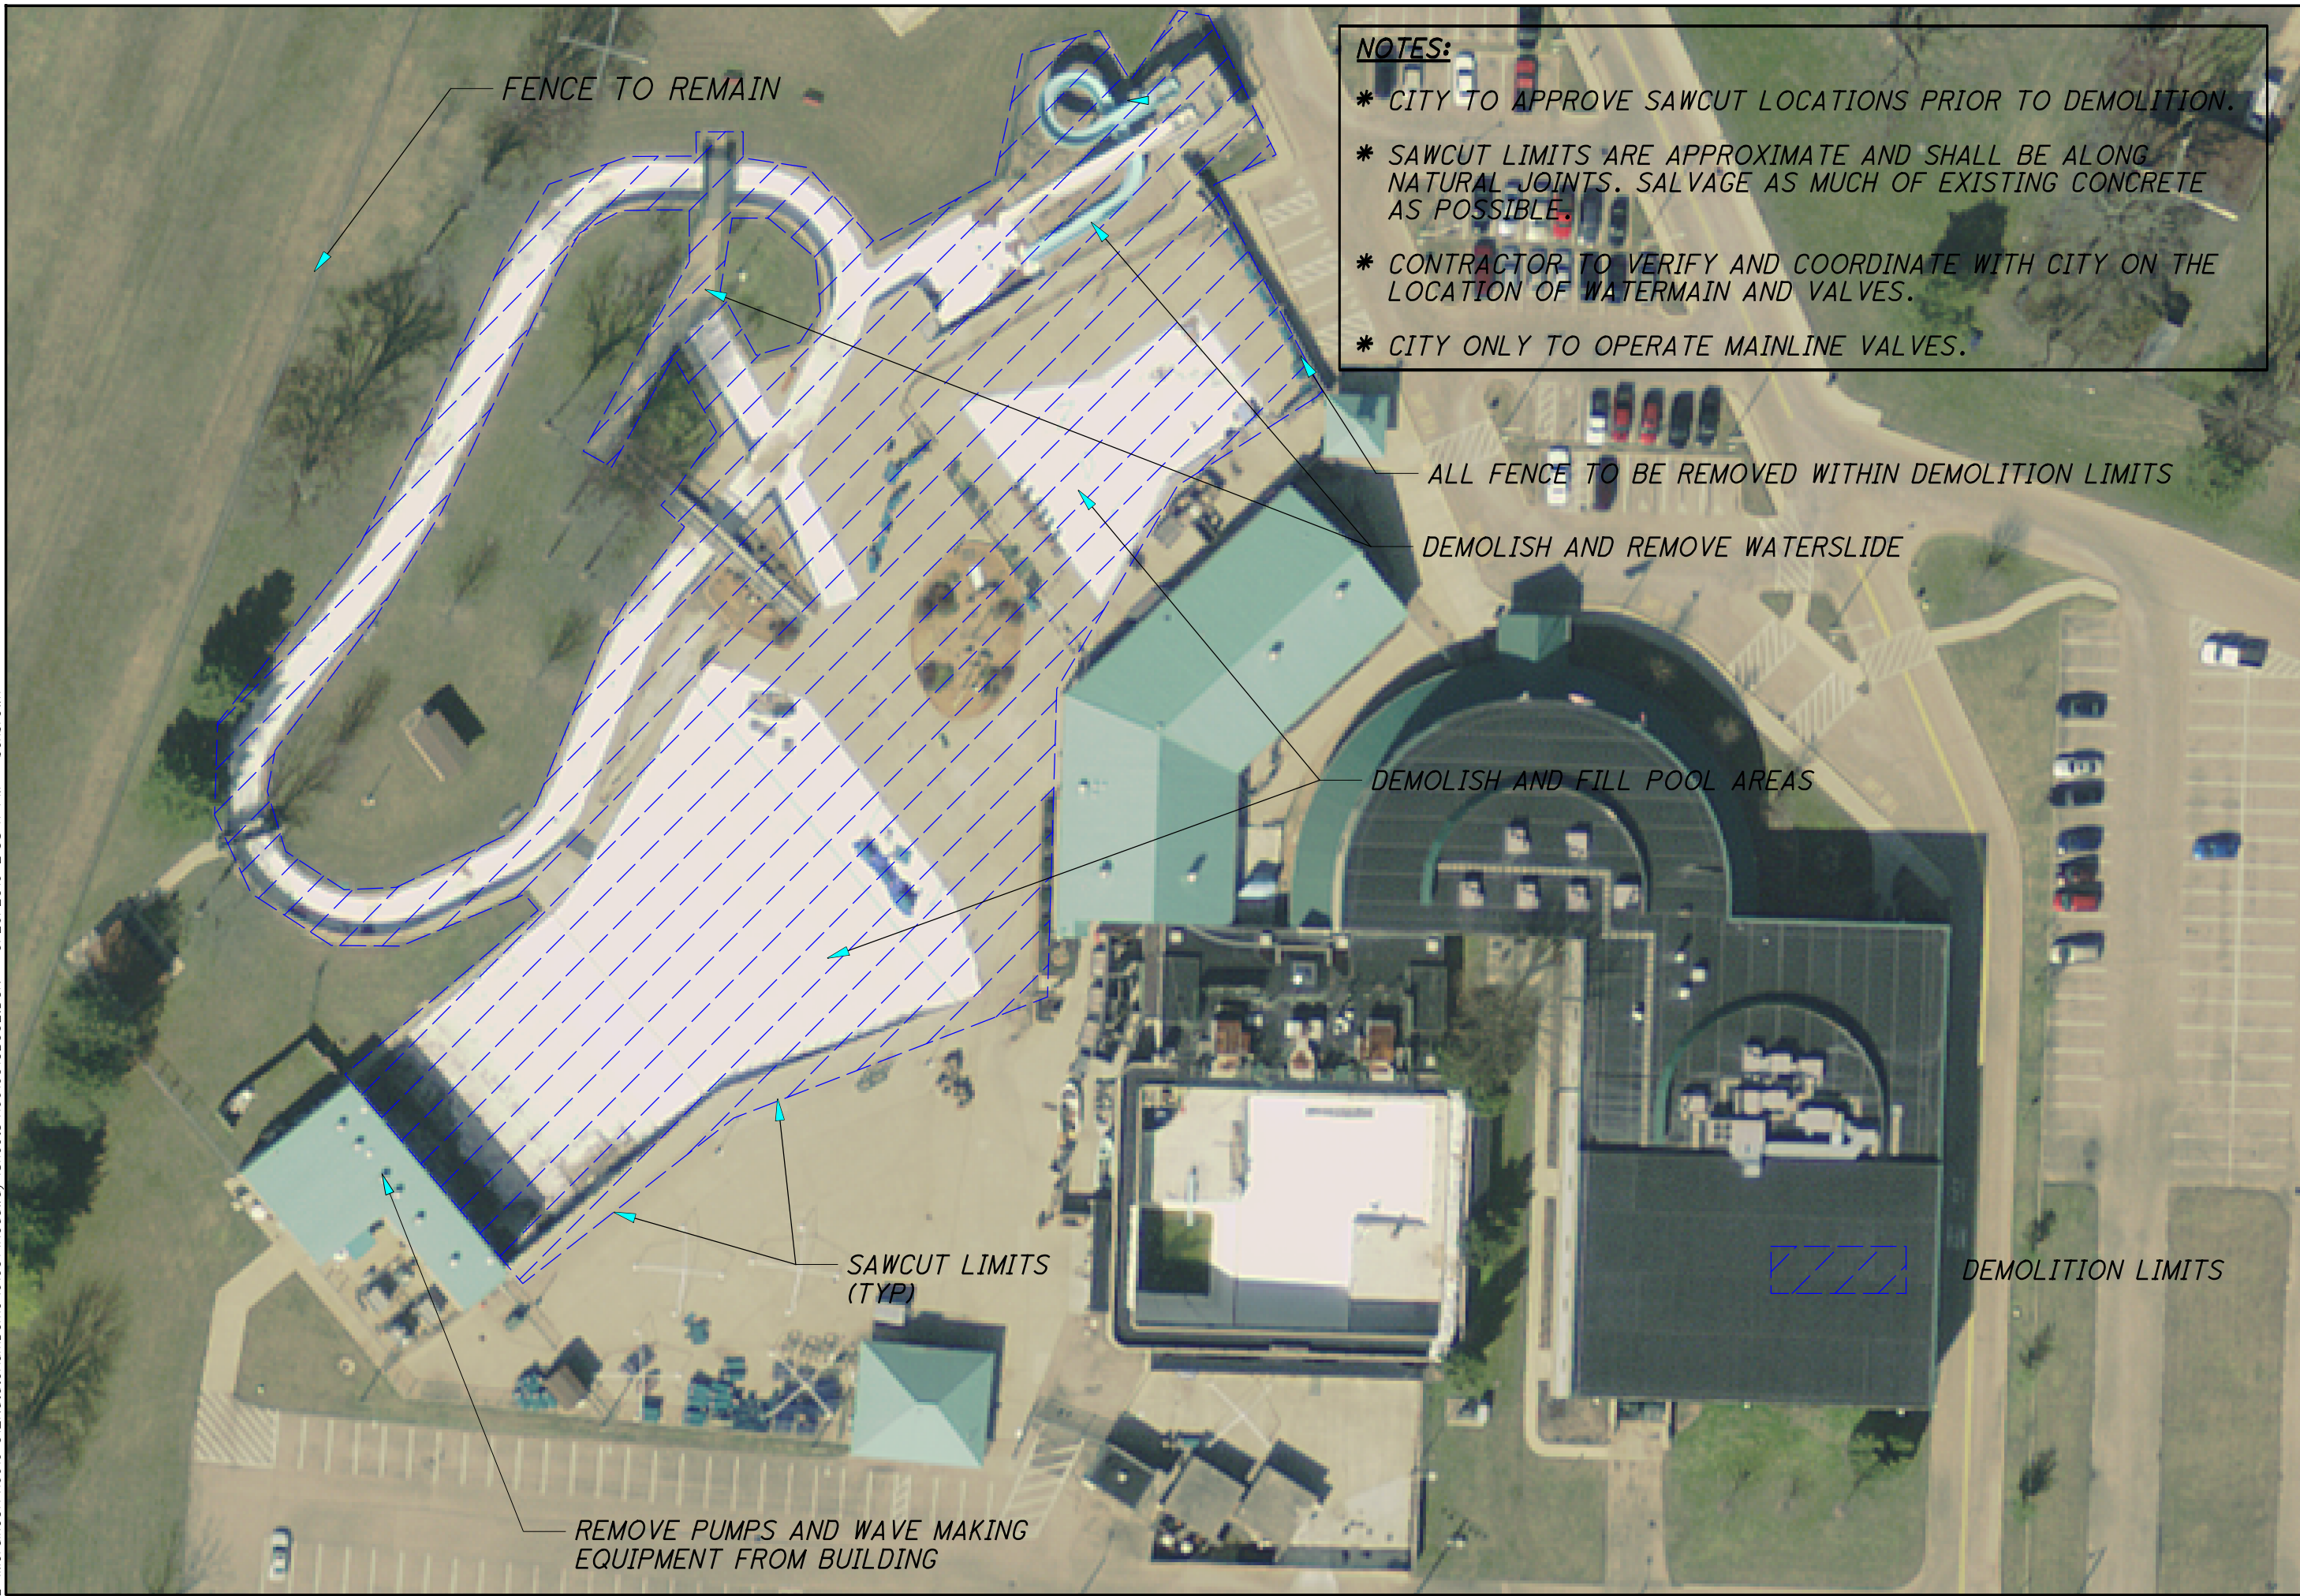

NOTES:

- * CITY TO APPROVE SAWCUT LOCATIONS PRIOR TO DEMOLITION.
- * SAWCUT LIMITS ARE APPROXIMATE AND SHALL BE ALONG NATURAL JOINTS. SALVAGE AS MUCH OF EXISTING CONCRETE AS POSSIBLE.
- * CONTRACTOR TO VERIFY AND COORDINATE WITH CITY ON THE LOCATION OF WATERMAIN AND VALVES.
- * CITY ONLY TO OPERATE MAINLINE VALVES.

CALCULATED BSB	CHECKED SRI	12.5 HORIZONTAL SCALE IN FEET	0 25 50	
REMOVAL PLAN				
SPLASH! MORaine DEMOLITION ADD ALTERNATE BID				
3/3				